
OPERATOR'S & PARTS MANUAL

KUBOTA®

GCK60-BX

GRASS CATCHER

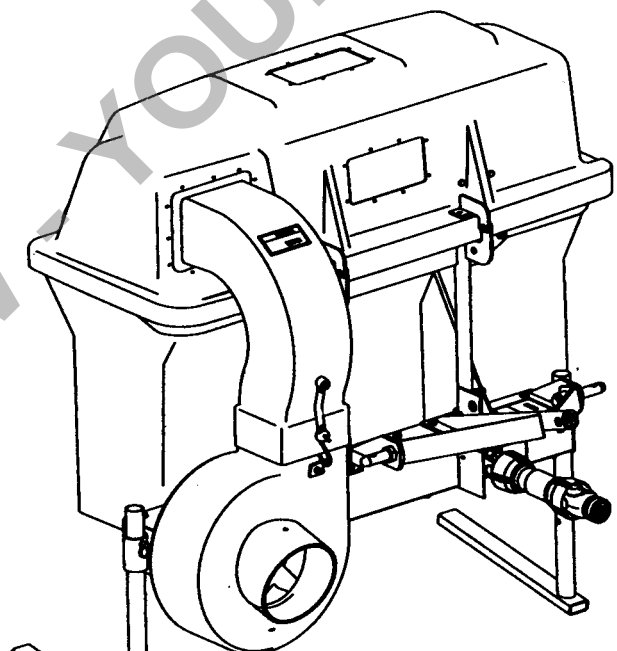

FORM 70050-95068 2/00

PREVIEW - YOUFIXTHIS.COM

Download full manual at youfixthis.com

TABLE OF CONTENTS

MODEL GCK60-BX GRASS CATCHER

SAFETY PRECAUTIONS 2
- Before Operation 2
- During Operation 3
- Maintenance 3
- Transporting & Storage 3

SAFETY SIGNS 4
- Care of Safety Signs 4
- Safety Sign Locations 5

INTRODUCTION 6
- Application 6
- General 6
- Model/Serial Information 6

SETTING-UP INSTRUCTIONS 7
- Mower Preparation 7
  - RCK54-22BX Mower Deck 7
  - RCK60B22BX Mower Deck 7
- Discharge Boot Kits 7
- Tractor Preparation 8
- Blower Installation 9
- Bag Frame Installation 13
- Cover Assembly & Installation 14
- Grass Bag Assembly 15
- Chute & Boot Installation 16

BOLT TIGHTENING CHART 17
- Standard Torque Values 17

OPERATING INSTRUCTIONS 18
- General Bagging Information 18
- Operating the Grass Blower 19
- Clearing Plugged Ducts 19
- Emptying Grass Bags 19

MAINTENANCE 20
- Scheduled Lubrication 20
- Cleaning Procedures 20
- Replacing the Cloth Grass Bag 20

PARTS LIST 21
- Blower Drive Components 22
- Blower Components 24
- Boot & Hose Components 26
- Gearbox Components 28
- Driveline Components 30
- Grass Bag & Frame Components 32
- Grass Catcher Lid Components 34
- Miscellaneous Lid Components 36

NUMERICAL INDEX 38

PREVIEW - YOUFIXTHIS.COM

Download full manual at youfixthis.com

SAFETY SIGNS



1. 66071-99081



2. 76700-41701




3. 70050-93896




4. 70050-02148



5. 66071-99091

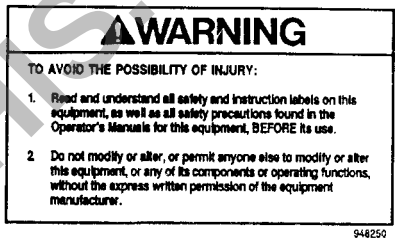

6. 70050-93958

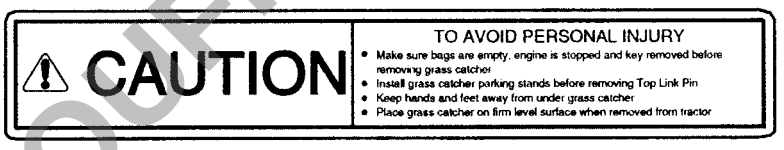

7. 70050-95067



PRINTED ON BAG
70050-93026
(P/N for one grass bag)

CARE OF SAFETY SIGNS

1. Keep all safety signs clean and free from obstructing material.
2. Clean safety signs with soap and water and dry with a soft cloth.
3. Replace damaged or missing safety signs with new safety signs from your KUBOTA Dealer.
4. If a component with a safety sign affixed is to be replaced with a new part, make sure a new safety sign is attached in the same location on the replacement part.
5. Mount new safety signs by applying on a clean and dry surface, working air bubbles from the center to the outside edges.

PREVIEW - YOUFIXTHIS.COM
Download full manual at youfixthis.com

OPERATING INSTRUCTIONS

GENERAL BAGGING INFORMATION

DANGER:
• Children
Tragic accidents can occur if the operator is not alert to the presence of children. Children are generally attracted to machines and the work being done. Never assume children will remain where you last saw them.

1. Keep children out of the operating area and under the watchful eye of another responsible adult.

2. Be alert and turn machine off if children enter the work area.

3. Before and when backing, look behind and down for small children.

4. Never carry children while operating the machine. They may fall off and be seriously injured or interfere with safe operation of the machine.

5. Never allow children to play on the machine or attachment even when turned off.

6. Never allow children to operate the machine even under adult supervision.

7. Use extra care when approahing blind corners, shrubs, trees, or other obstructions that might hide children from sight.

CAUTION:
Always make sure all grass catcher components are properly installed and securely fastened before mowing.

CAUTION:
Eye and hearing protection is recommended when operating the grass catcher.

Always mow at full engine speed. This will insure the most airflow into the grass bags. If the tractor engine lugs down while mowing, reduce the tractor ground speed.

Grass and leaf collecting performance depends on air flow into the bags. Mow when the grass is dry.

Chute and blower plugging can be more frequent in wet conditions.

Tall grass clippings may also plug the blower and chute. Mow at the highest height of cut and remow the entire area at the final desired height to avoid plugging.


CAUTION:
Do not allow anyone to ride on the tractor/mower/grass catcher at any time. There is no safe place for passengers on this equipment. The operator must sit in the tractor seat.

NEVER mow with the mower raised in the transport position. When transporting the mower/grass catcher, ALWAYS disengage the tractor PTO.

Mow up and down slopes, not across. Avoid all grass catcher operation on steep slopes.

Stay alert for holes or bumps that could effect stability of the tractor/mower/grass catcher.

NOTE: Plastic lawn and leaf bags, 33 gallon size, can be used inside the cloth bags. Be sure to leave enough plastic bag over the bag frame so the plastic bags can be twist tied and removed.

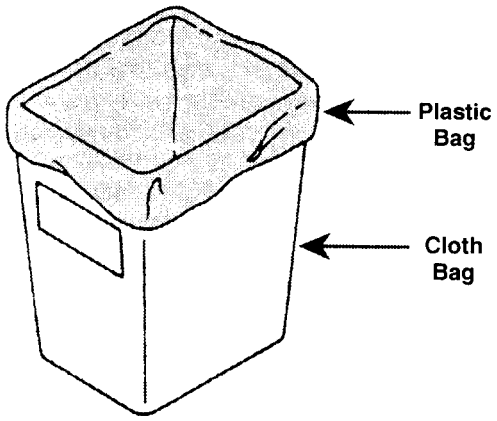

CAUTION:
Inspect the mower and grass catcher after striking any foreign object. This is to assure that all mower/grass catcher parts are safe and secure and are not damaged.

PREVIEW - YOUFIXTHIS.COM
Download full manual at youfixthis.com

SETTING UP INSTRUCTIONS


MOWER PREPARATION

IMPORTANT: A RCK54-22BX or RCK60B22BX mower deck must be completely installed and operational on the BX1800D or BX2200D tractor before the grass catcher can be installed!


NOTE: See the parts list illustrations for visual assistance during assembly of the grass catcher.

RCK54-22BX MOWER DECK

1. Remove the rear gauge wheel on the discharge side of the deck. Drill a 25/64 (.390) hole 2 inches from the bottom deck lip up and 15/16 inch over from the outer edge of the deck. See figure to the right. This hole will be used for mounting of the boot. Reinstall gauge wheel after drilling of the hole.

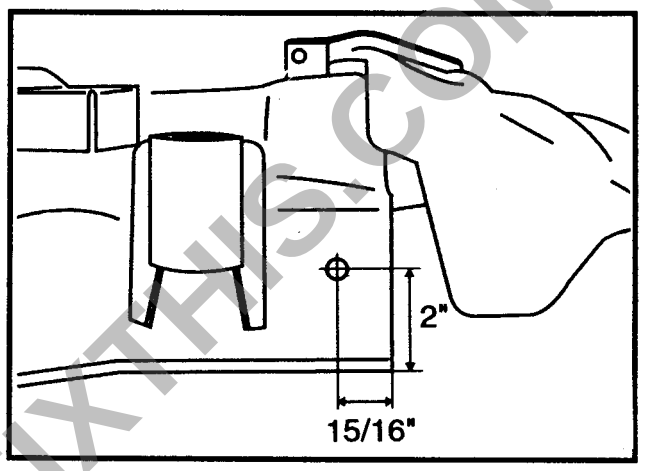


2. Enlarge the current hole by drilling the hole out to 25/64 (.390). See figure to the right. Location is not critical as the hole is used to connect the front boot hook band.

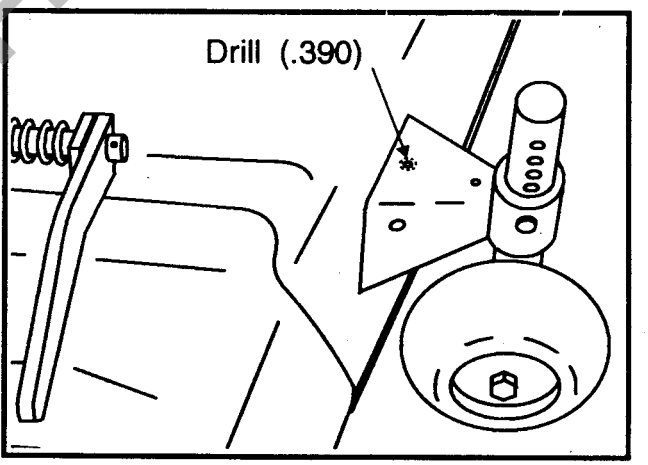

RCK60B22BX MOWER DECK

1. BX3061 Boot Kit baffle will need to be installed. Drill two 25/64 (.390) holes 5 1/4 inches in from the outside discharge edge, and 2 1/2 inches in from the front edge of deck. Spacing between holes should be 3 3/4 inches. Holes need to run parallel with the discharge opening. See figure to the right. Baffle will be bolted in using two 3/8-16 x 5/8 whiz lock bolts and two 3/8 whiz lock nuts.

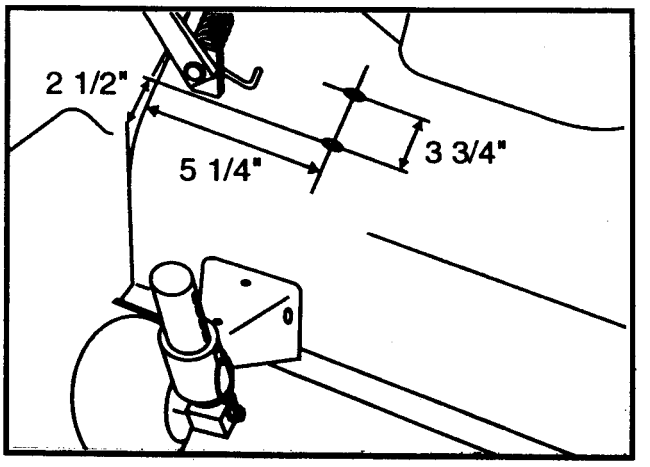

NOTE: Make sure the correct boot kit is to be used with the proper deck. Boot kit BX3051 is required for the RCK54-22BX deck, and boot kit BX3061 is needed for the RCK60B22BX deck. Kits are not interchangeable and will not fit properly if incorrect.

PREVIEW - YOUFIXTHIS.COM

Download full manual at youfixthis.com


PARTS LIST - Blower Drive Components

REF	PART NUMBER	DESRIPTION	QTY.
1	70050-94893	BLOWER HOUSING	1
2	70050-94894	FAN	1
3	70050-94974	GEARBOX MOUNT WLDT.	1
4	70050-94975	HUB, Fan Mount	1
5	70050-94976	TRIM EDGE	1
6	70050-94977	DRIVELINE, Fixed	1
7	70050-94978	COVER WLDT.	1
8	70050-94979	PLUG, Plastic	1
9	70050-94980	GEARBOX, 1.93 : 1 PTO	1
10	70050-94981	GEARBOX, 1.93 : 1 FAN	1
11	66091-99334	STAY HOOK	1
12	70050-02741	BOLT FLANGE HD, 5/16-18 X 5/8	12
13	75599-01115	BOLT , 1/4-20 X 3/4	1
14	70050-94982	BOLT, 5/16-18 X 2 3/4	1
15	75599-32111	FLATWASHER, 1/4	1
16	70050-94983	SET SCREW, 5/16-18 X 1/2	1
17	70050-94933	BOLT CARRIAGE HD, 1/4-20 X 3/4	8
18	75599-31931	LOCKNUT, 1/4-20	1
19	70050-94932	NUT WHIZ LOCK, 1/4-20	8
20	70050-93542	BOLT FLANGE HD, 5/16-18 X 1	4
21	70050-94984	LOCKNUT, 5/16-18	3
22	70050-94985	BOLT, 5/16-18 X 1 1/2	2

PREVIEW - YOUFIXTHIS.COM


Download full manual at youfixthis.com

PARTS LIST - Blower Drive Components

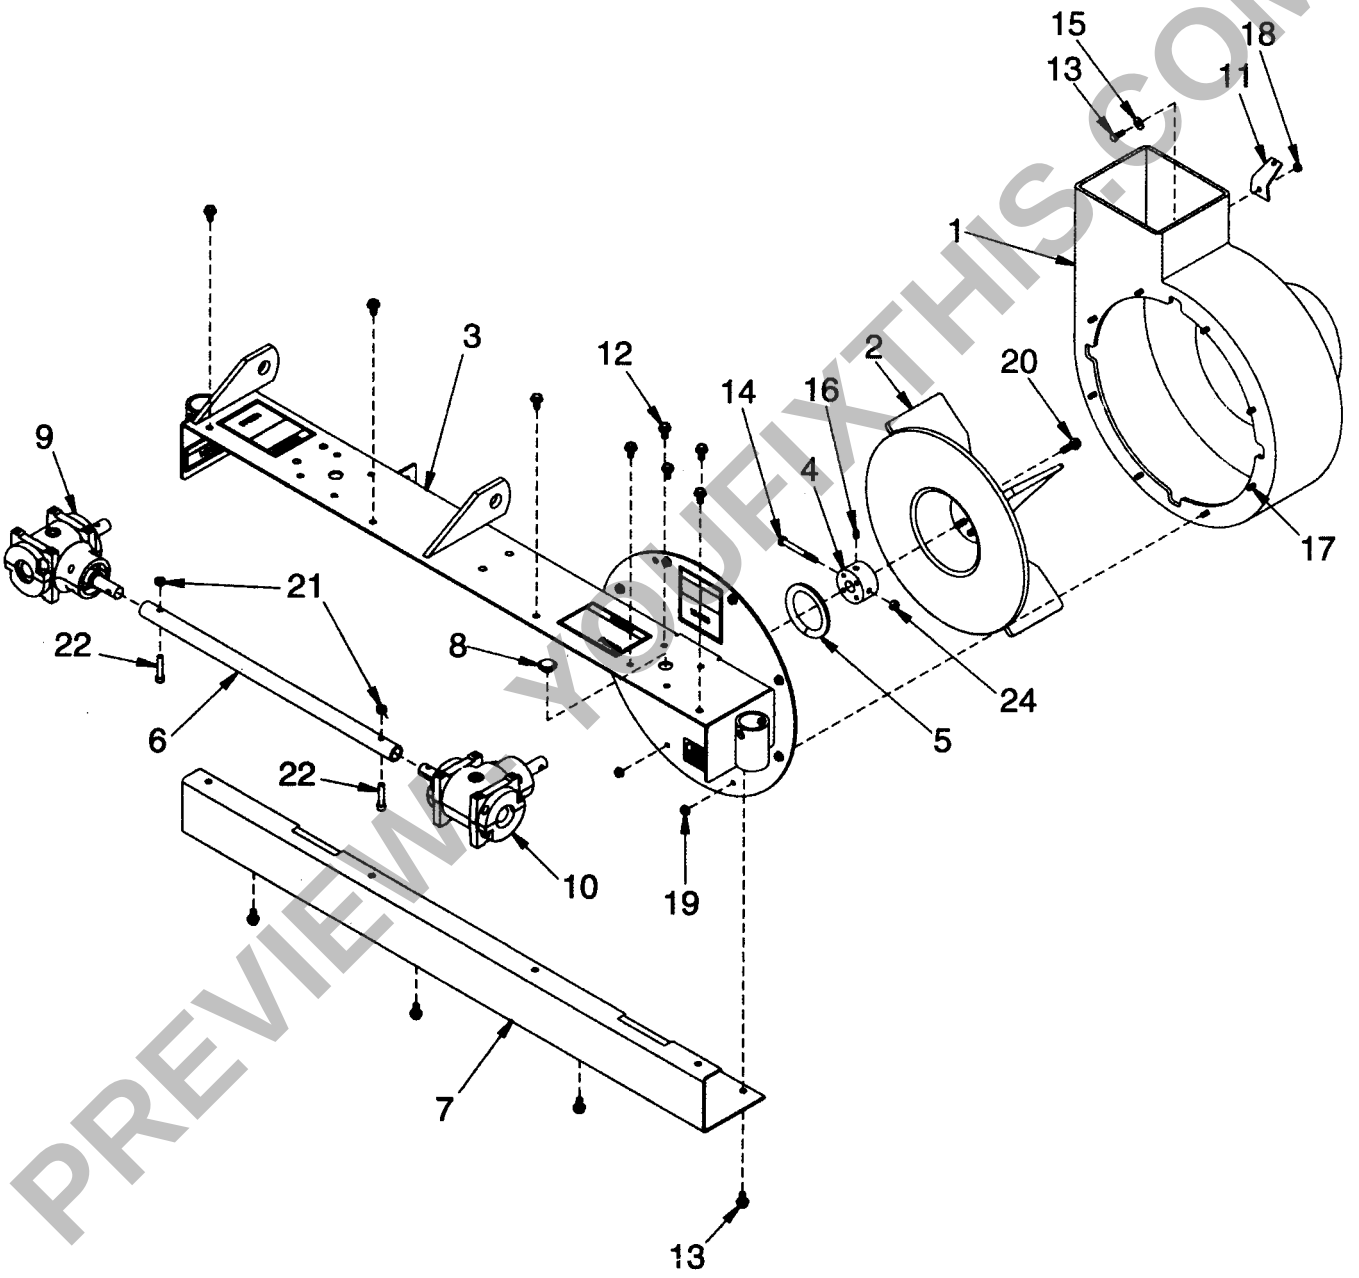

PREVIEW - YOUFIXTHIS.COM

Download full manual at youfixthis.com

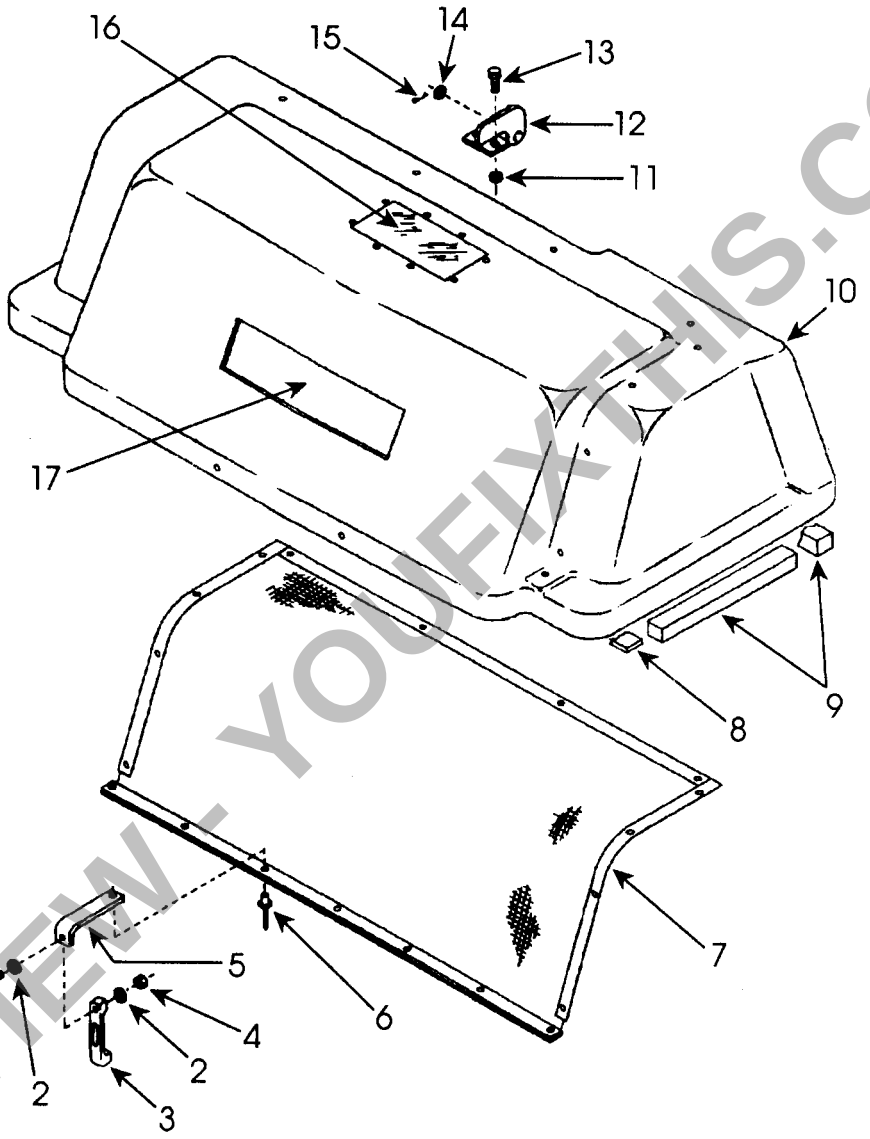

PREVIEW - YOUFIXTHIS.COM

Download full manual at youfixthis.com

PREVIEW ONLY

You're viewing 8 of 44 pages

The full manual includes:

- All 44 pages, complete
- Searchable PDF (find any keyword)
- No watermarks
- Instant download
- Print-ready quality

GET FULL MANUAL NOW

Kubota GCK60-BX Operator Manual

Scan or click anywhere
youfixthis.com

Click anywhere on this page to get the full manual