OPERATOR'S MANUAL


Lake Charles 436-4366 G4200

KUBOTA

ROTARY MOWER

MODEL RC40-G
RC44-G
RC48-G

Blad
Model RC44-G

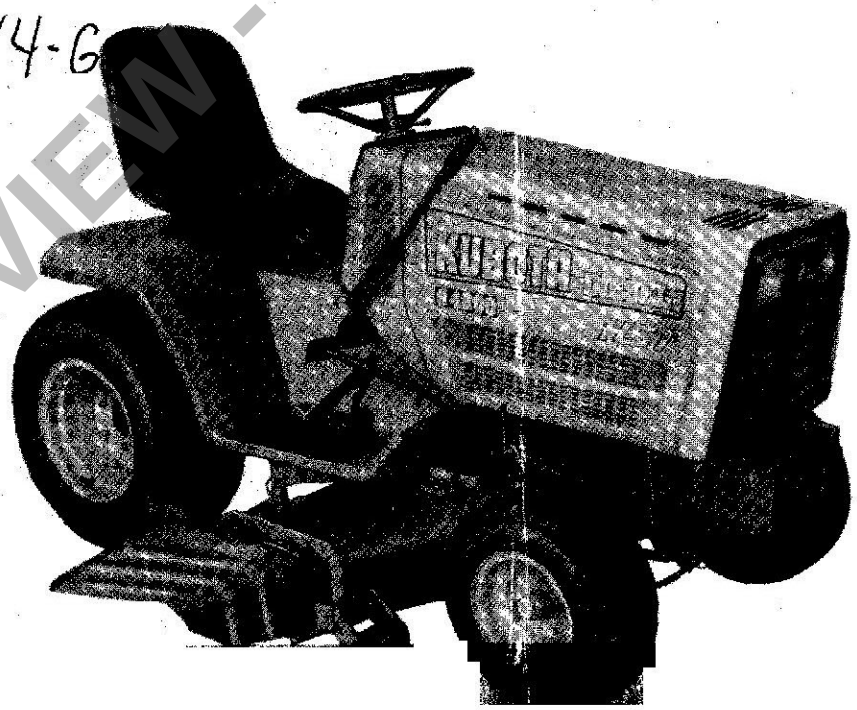

READ AND SAVE THIS BOOK

PREVIEW - YOUFIXTHIS.COM
Download full manual at youfixthis.com

KUBOTA

CONTENTS

1. Foreword 1
2. Service 2
3. Introduction 2
   3.1 Specifications 2
   3.2 Mower terminology 3
4. Setting up 4
   4.1 Pre-assembly 4
   4.2 Setting up the mower 4
5. Mounting to the tractor 5
6. Mower adjustments 7
   6.1 Adjusting the Parallel linkage 7
7. Operation 8
   7.1 Making the most of your mower 8
   7.2 Cutting height 8
   7.3 Operating mower 9
8. Maintenance 10
   8.1 Periodic lubrication and maintenance check 10
   8.2 Blade replacement 12
   8.3 Belt replacement 13
   8.4 Tightening torque chart 14

Parts list 15

PREVIEW - YOUFIXTHIS.COM

Download full manual at youfixthis.com

⚠ SAFETY PRECAUTIONS

For your own safety and satisfaction, read and follow the safety precautions given below.

1. Keep bystanders [redacted] from the machine [redacted]
2. Prior [redacted] to be mowed [redacted] which might be picked up by the mower. Mow only in daylight [redacted] good artificial light.
3. Do not wear loose clothing while operating the mower. Loose clothing could become entangled in moving parts, causing personal injury.
4. Do not stand on the mower.
5. Before dismounting the tractor:
   a) Shut off the engine,
   b) remove the key,
   c) set the parking brake,
   d) allow the blades to stop.
6. Securely tighten all hardware before operating the mower.
7. Read this manual and the tractor operator's manaual before operating mower. Allow only a properly trained person to operate the tractor.
8. Before starting the engine, disengage the front PTO and sit on the seat.
9. Hillside operation is dangerous and cannot be recommended. If it is necessary to mow on a hillside, use extreme caution. Never mow across the face of a slope.
10. While making turns operating in rough terrain, reduce tractor speed.
11. Upon striking a foreign object, stop and inspect the tractor and the mower for damage. Repair the damage before resuming equipment operation.
12. If the mower discharge chute becomes clogged, stop the tractor; disengage the mower drive; shut off the engine and remove the key; and clean out the chute before continuing.
13. Know how to stop the mower and engine quickly. Be prepared for any emergency situation.
14. When mowing in rough terrain or in high grass, set the mower at the highest cutting level to reduce the possibility of the mower striking debris or hidden objects.
15. Before operating the tractor in reverse, look to see if the area is clear of all objects.
16. Do not operate the mower without all shields and guards in place.
17. Never attempt to make adjustment or repairs of any kind when the tractor and mower are running. Shut off the engine, remove the key and allow the blades to stop.
18. Replace damaged or illegible safety decals.
    See next page for required labels.

PREVIEW - YOUFIXTHIS.COM

Download full manual at youfixthis.com

2. SERVICE

(1) When in need of parts or of service, give the serial number of the Mower to the dealer.
(2) The serial number is located on the right side of the deck.
(3) For your reference, please record the serial number in the space provided.


KUBOTA MOWER

MODEL _____

SERIAL NUMBER _____

DATE OF PURCHASE _____

NAME OF DEALER _____

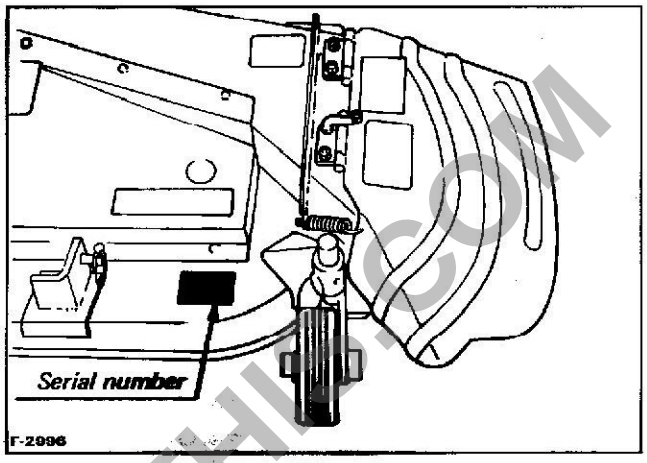

3. INTRODUCTION


3.1 SPECIFICATIONS

Model		RC40–G	RC44–G	RC48–G
Mounting method		Parallel linkage		
Adjustment of cutting height		Gauge wheel		
Cutting width		1032 mm (40.6 in.)	1118 mm (44 in.)	1224 mm (48 in.)
Cutting height		36 mm to 90 mm (1.4 to 3.5 in.)		
Weight (Approx.)		68 kg (150 lbs.)	71 kg (156 lbs.)	78 kg (172 lbs.)
Blade spindle speed		66.97 r/s (4018 rpm)	63.93 r/s (3836 rpm)	59.93 r/s (3596 rpm)
Blade tip velocity		78.3 m/s (15400 fpm)		79,8 m/s (15700 fpm)
Blade length		372 mm (14.6 in.)	390 mm (15.3 in.)	424 mm (16.7 in.)
Number of blades		3		
Dimensions	Total length	822 mm (32.4 in.)	825 mm (32.5 in.)	919 mm (36.2 in.)
	Total width	1384 mm (54.5 in.)	1430 mm (56.3 in.)	1540 mm (60.6 in.)
	Total height	282 mm (11.1 in.)		


PREVIEW - YOUFIXTHIS.COM

Download full manual at youfixthis.com

3.2 MOWER TERMINOLOGY

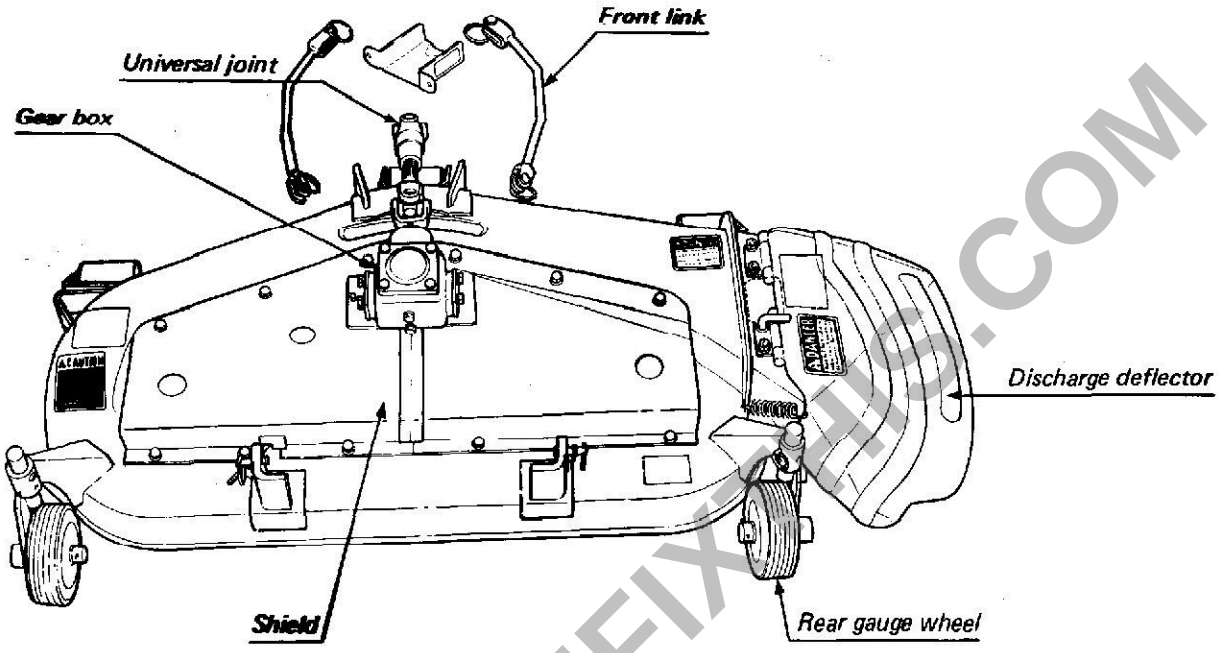

F-2995

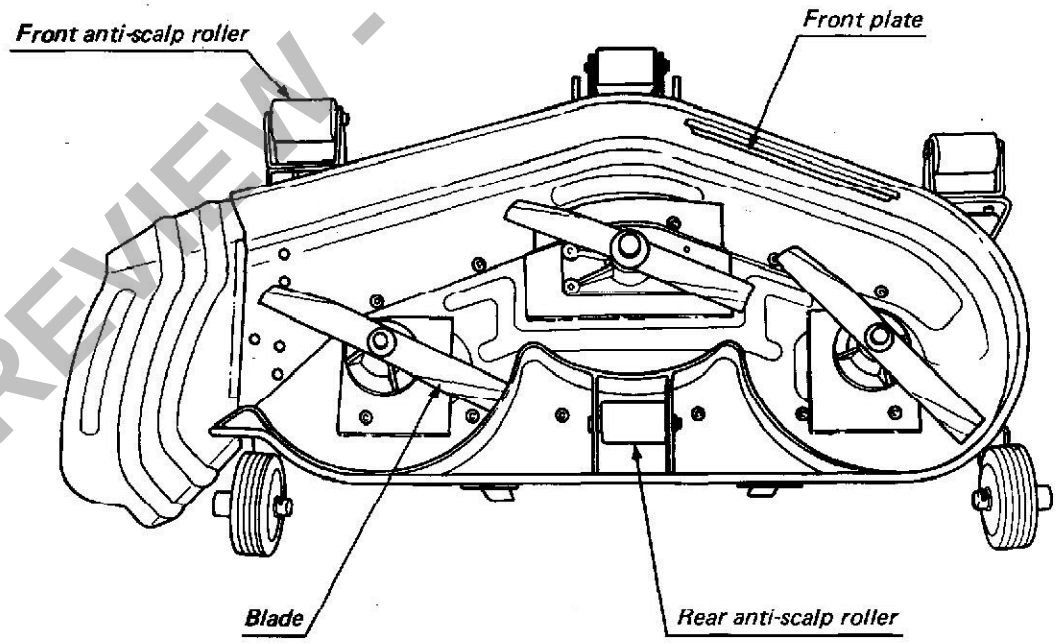

F-2997

PREVIEW - YOUFIXTHIS.COM

Download full manual at youfixthis.com

PREVIEW ONLY

You're viewing 5 of 9 pages

The full manual includes:

- All 9 pages, complete
- Searchable PDF (find any keyword)
- No watermarks
- Instant download
- Print-ready quality

GET FULL MANUAL NOW

Kubota RC40-G, RC44-G, RC48-G Operator Manual

Scan or click anywhere
youfixthis.com

Click anywhere on this page to get the full manual